
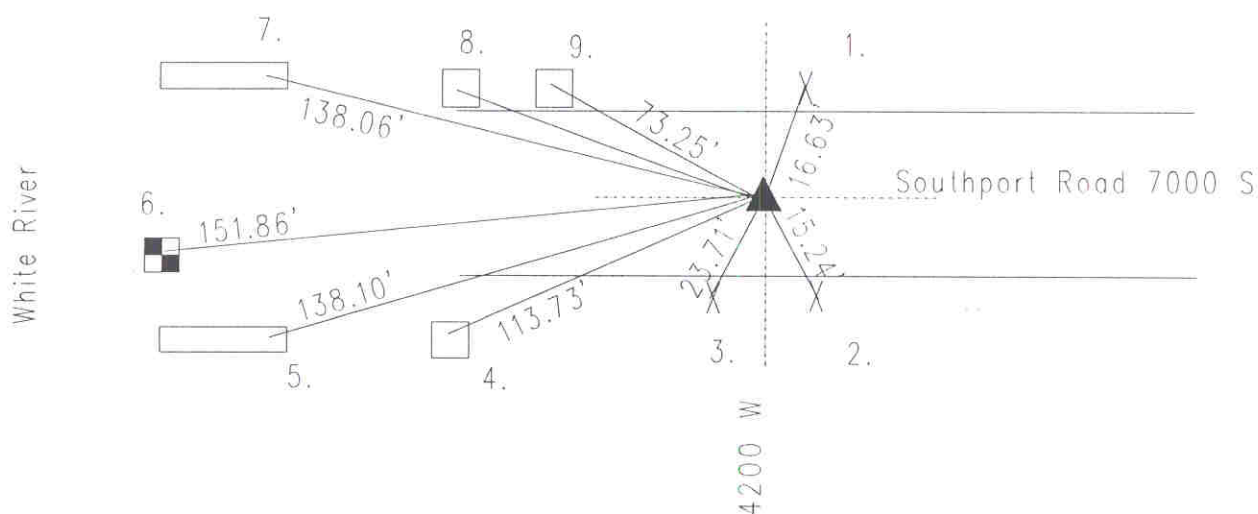


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 17 TOWNSHIP 14 RANGE 3
DATE: 6-30-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 11-23-99

IN. S.P.C. E ZONE NAD '83
NAME: 14031701
N: 490254.2082(m)
E: 51276.6392(m)

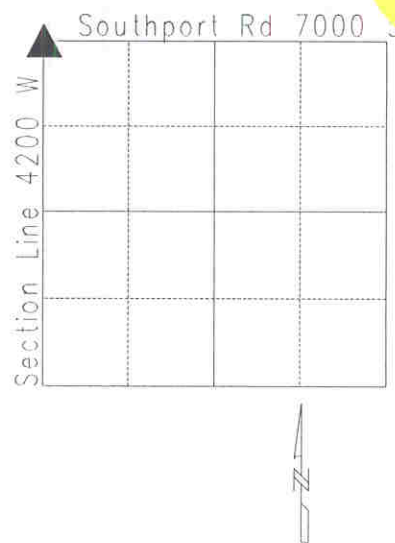

Original post set 1820 by Wm. B. Laughlin with witnesses: 6" hornbeam N 78 E 19 links, 10" buckeye N 86 W 12 links per Marion County Atlas pg. 5. Rock set 1848 by Hosbrook with witness: 22" beech N 29 W 45 links; 15" beech N 37 W 46 links. 12-21-43 Woerner called pipe down 3" with stake at surface. 12-4-59 Monroe called iron pin 3" down. 12-9-70 McLand called a railroad spike 5" down, beside steel pin. 2-25-72 McLand re-tied corner and called for steel pin. 6-25-75 Miller called the same. 1-31-86 Green called the same. 6-13-90 excavated 1" steel pin found 5" down with a railroad spike beside it. Harrison set. Re-tied 12-20-94 by Kiste. Re-tied 11-23-99 by Wilcoxon. Re-tied 6-30-04 by Wilcoxon.

14031701

REF.	DISTANCE	DESCRIPTION
1.	16.63'	Cut 'x' in bolt in guard rail
2.	15.24'	Cut 'x' in bolt in guard rail
3.	23.71'	Cut 'x' in bolt in guard rail
4.	113.73'	Mag nail w/brass washer top of wooden guard rail post
5.	138.10'	Cut 'x' E-end of concrete bridge rail
6.	151.86'	Benchmark Perry 5001
7.	138.06'	Cut 'x' E-end of concrete bridge rail
8.	79.17'	Mag nail w/brass washer top of wooden guard rail post
9.	73.25'	Mag nail w/brass washer top of wooden guard rail post